


LINE PROPERTIES

SINGLE HEAD COILING AND SPOOLING FOR SINGLE AND MULTI CORE CABLES

Developed for coiling and spooling of single/multi core insulated cables

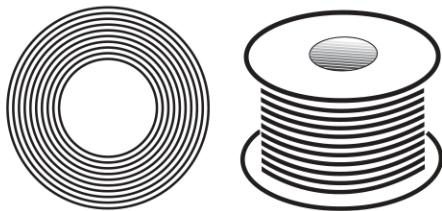

CONFIGURATION

A. Cable coiling and spooling unit, stretching unit



- . 100mm high stretch for all spool size
- . Excellent stretch wrapping quality
- . Coiling and spooling function on same head

B. DM1600 Motorized Pay off


- . Maximum spool outer diameter :1600mm
- . Minimum spool inner diameter : 800mm
- . Maximum spool height : 2,5 ton

C. SH800 Shrinking Unit


- . Hot film cutting device for long lifeworking time
- . Minimum energy consumption
- . Efficient shrinking due to good air ventilation in tunnel

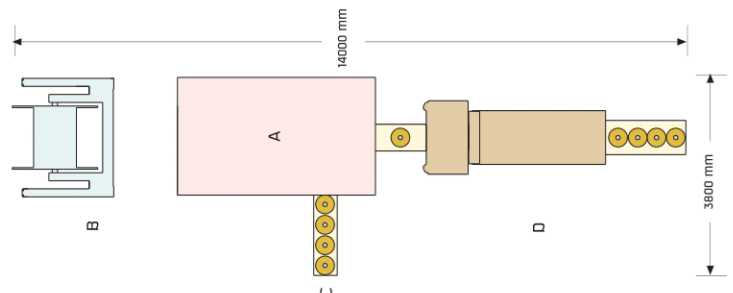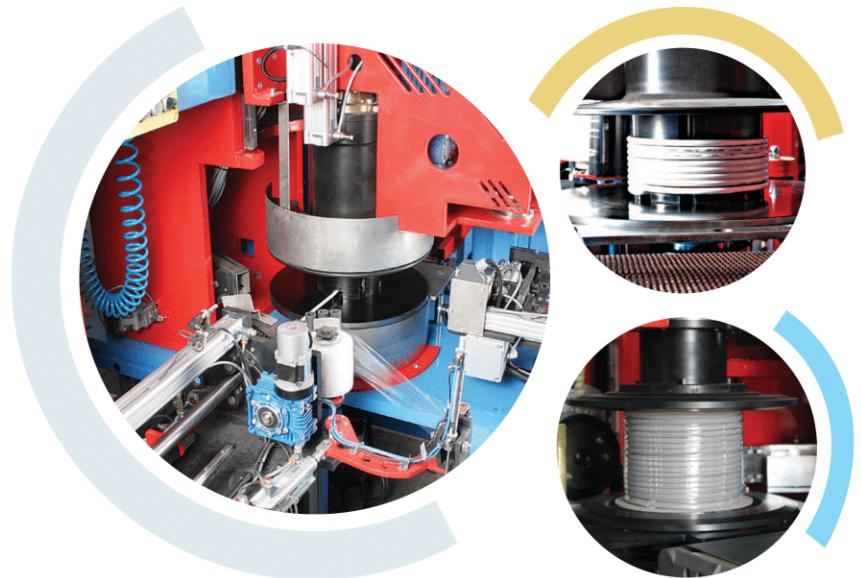

Coil and Spool Dimension

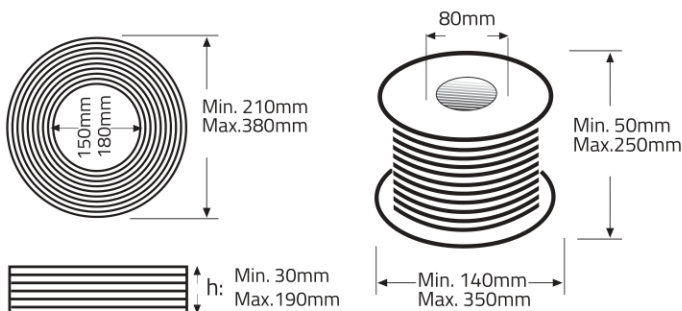

CABLE TYPE

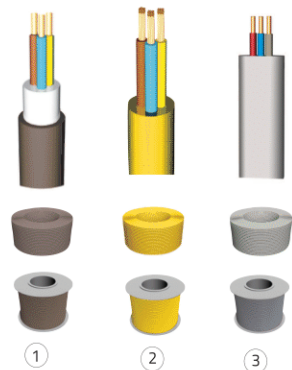

1. Rigit, Flexible or multi stranded insulated wire 1,5 up to 16 mm²
2. Rigit or flexible multi core from 2x0,75 up to 4x1,5 mm²
3. Flat twin and eart type cable from 2x1+1 up to 2x4+2,5 mm²

Spool material : Carton, plastic, metal