


### LINE PROPERTIES

### SINGLE HEAD COILING AND SPOOLING FOR SINGLE AND MULTI CORE CABLES

Developed for coiling and spooling of single/multi core insulated cables

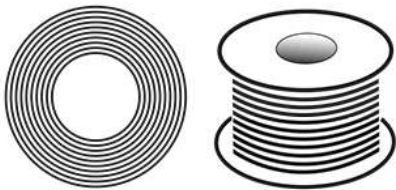

### CONFIGURATION

#### A. Doublematik 600 coiling/spooling and stretching unit


- Quadrant Following Function®
- Coiling and Spooling on the same head
- Wide working range

#### B. DM1600 Motorized Pay off


- . Maximum drum OD : 1600 mm
- . Minimum drum OD : 800 mm
- . Maximum drum weight : 2,5 ton

#### C. SH800 Shrinking Unit

- . Hot film cutting device for long life, smokeless cutters
- . Minimum energy consumption
- . Efficient shrinking due to good air ventilation in tunnel

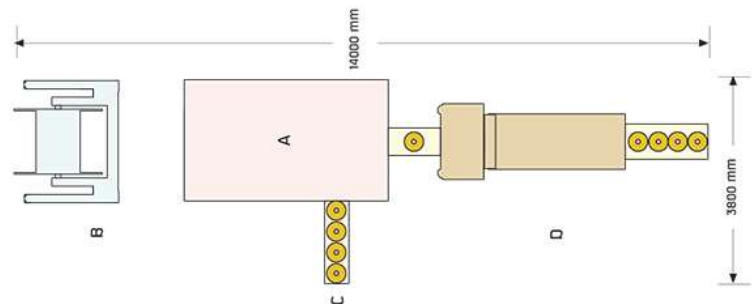


### COIL & SPOOL SIZE

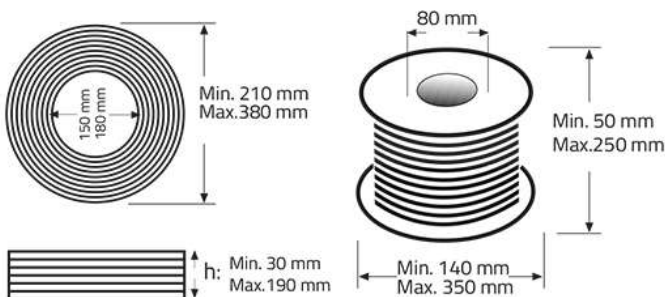

Spool material : Carton, plastic, metal

### CABLE TYPE

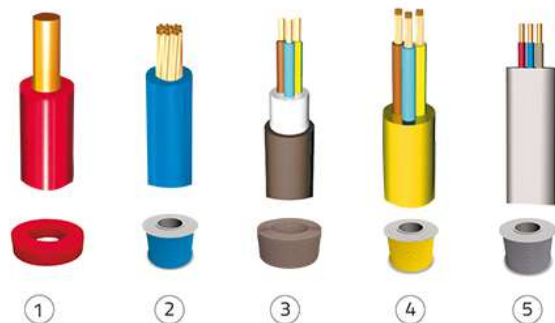

1. Rigid, Flexible or multi stranded wire coiling  
6 mm<sup>2</sup> up to 25 mm<sup>2</sup>
2. Flexible or rigid multi core cable spooling  
from 2x1mm<sup>2</sup> up to 6x4 mm<sup>2</sup>
3. Flat twin and eart type cable from spooling  
2x1+1 up to 2x4+2,5 mm<sup>2</sup>