


LINE PROPERTIES

**High speed, double head design
insulated single wire cable packing line**

Developed for high speed packing of 2-5 mm diameter cable with shrink film

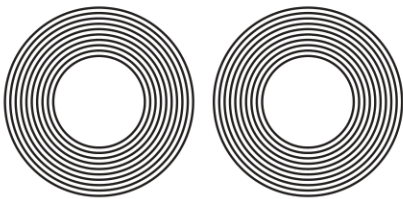

CONFIGURATION

A. Speedmatik 240 Double Head Coiler and Stretching Unit

- . ± %0,15 length tolerance
- . Improved laying up
- . Variable coil outer diameter and height
- . Siemens SIMOTION control system

B. DF1250 Double Flyer Payoff HB1250 Double Driven Payoff



- . Suitable for 800mm - 1250mm outer reel diameter
- . Minimum change over time
- . Maximum sound insulation

C. SH400 Shrinking Unit


- . Long life, smokeless cutters
- . Minimum energy consumption
- . Efficient shrinking due to good air ventilation in tunnel

Optional equipment;

- A. Coil grouping unit with strap
- B. Coil staker on pallet
- C. Empty pallet magazine
- D. Pallet stretching unit

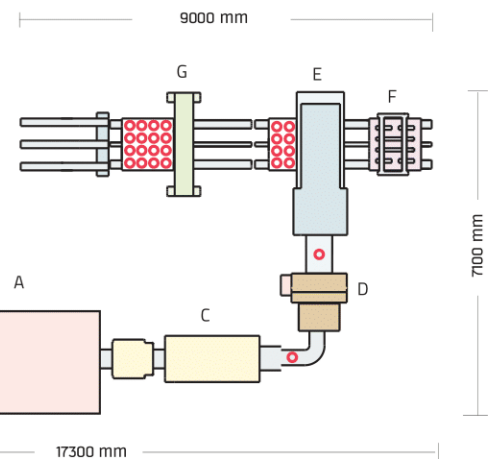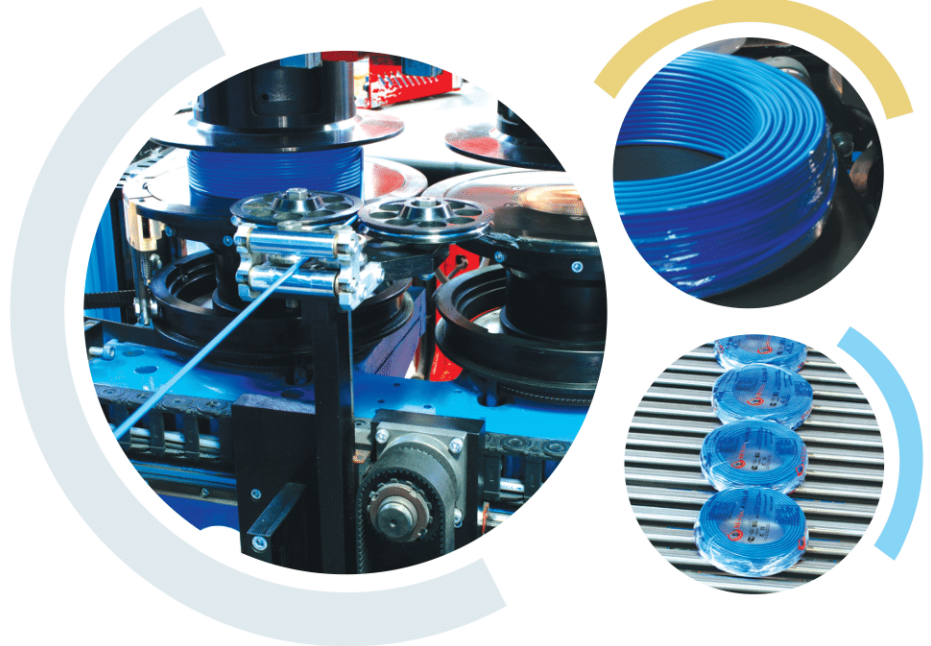


Coil Dimension;

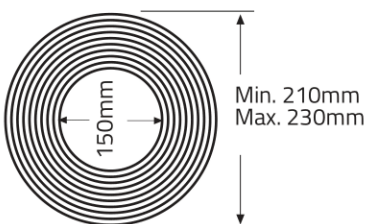

Min. 210mm
Max. 230mm

h: Min. 20mm
Max. 90mm

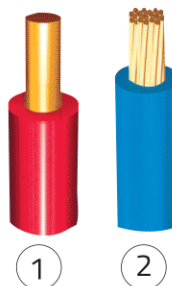

● CABLE TYPE

1. Rigid or multi stranded single wire from 1,5 mm² up to 6 mm²
2. Flexible single wire from 0,75 mm² up to 6 mm²