
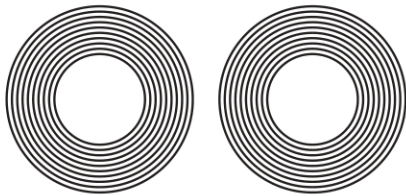


LINE PROPERTIES

Double head coiling for single and multi core cables

Developed for coiling and shrinking of single and multi core cables with diameter from 3 mm up to 14 mm

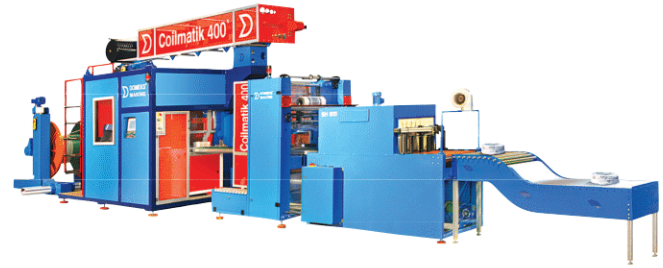

CONFIGURATION

A. Coilmatik 400 Single head coiler and stretching unit

- . ± %0,15 length tolerance
- . Improved laying up
- . Variable coil outer diameter and height for boxes dimension
- . Siemens SIMOTION control system
- . Continuous spark and lump/neckdown control





B. HB1600 Driven Payoff

- . Suitable for 800mm-1600mm outer reel diameter
- . Minimum change over time
- . Maximum 2.5 ton reel weight

C. SH 800 Shrinking Unit

- . Long life, smokeless cutters
- . Minimum energy consumption
- . Efficient shrinking due to good air ventilation in tunnel

Coil Dimension;

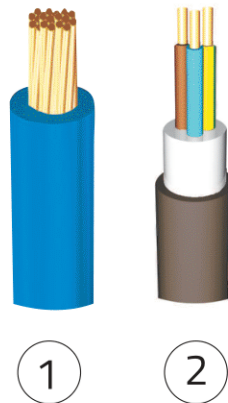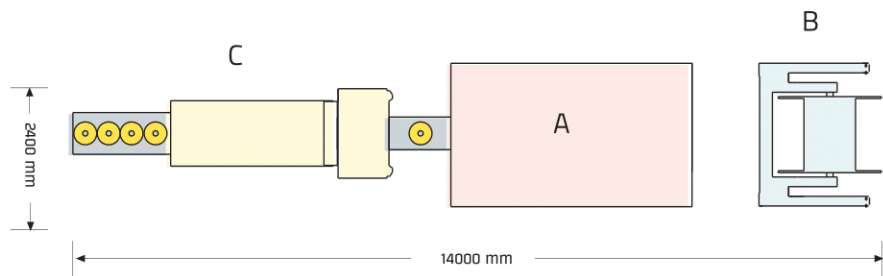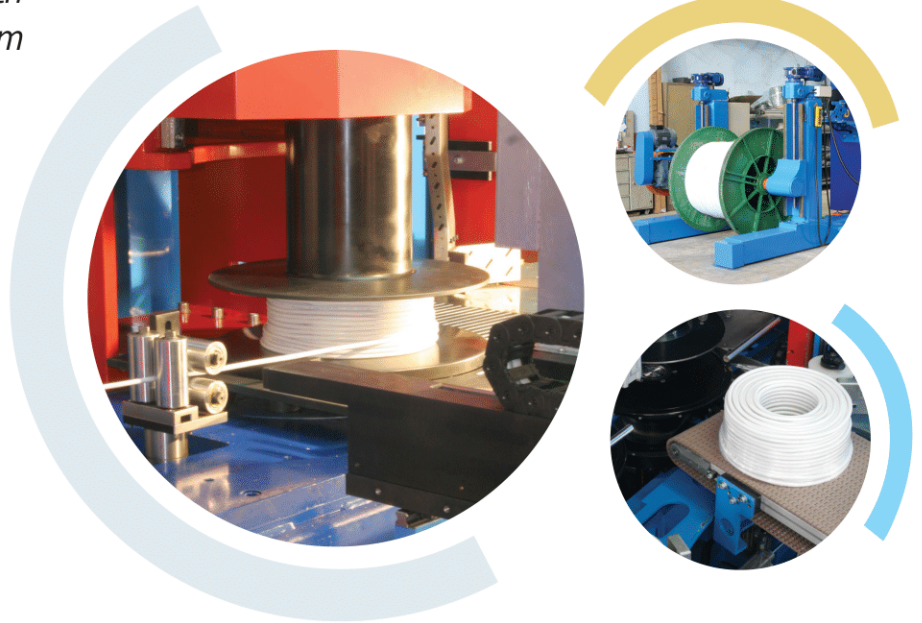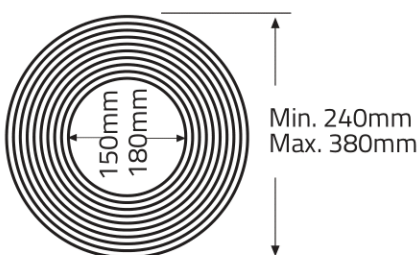

● CABLE TYPE

1. Rigid, flexible or multi stranded insulated single wire;
From 1,5 mm² up to 16 mm²
2. Flexible or rigid multi core cable;
From 2x0,75 mm² up to 4x2.5mm²
3. Flat twin and eart type cable
from 2X1+1 up to 2x4+2,5 mm²